



10W COB Dotless IP20 Strip Light

24V (8mm)


Applications:

Residential and Commercial Applications.

- 480 LED p/m Uniform Dotless LED strip light providing continuous illumination.
- 30z thick PCB, designed to rapidly dissipate heat extending the LED Chips lifespan.
- Aluminium Profile is required when installing LED strip.
- Genuine 3M tape backing, allowing for a long-lasting surface bonding solution.
- Ultra-Customizable with cutting points every 50mm.
- Available in 24V and requires pairing with one of our 24V DC Constant Voltage LED Drivers.
- Dimmable 24V COB LED Strip with an Ultra High CRI > 90 for excellent colour rendering.
- 5m series installation with no voltage drop.
- Suitable for use in all commercial/residential applications.

Product Performance	
Wattage	10W
Colour Temperature & Stock Code	1m 6000K - S301 1m 4000K - S302 1m 3000K - S303 5m 6000K - SR301 5m 4000K - SR302 5m 3000K - SR303 50m 6000K - SR301A 50m 4000K - SR302A 50m 3000K - SR303A
Life Span/ LB Rating	30000hrs
IP Rating	IP20
Beam Angle	180°
Input Voltage	24V DC
Cutting Point	5 cm
CRI	>90
LED Chips	COB
LED Chips Qty	480/m
Lumen Output	1100lm/m
Dimmable	Yes
Dimmable Range	0-24V
Note	Max 5m series installation with no voltage drop.
Physical Character-	
Weight (g)	100
Product Dimensions	2.3x8x5000mm
Mounting Option	Back Adhesive
Cable Length	20cm

Dimension Drawing

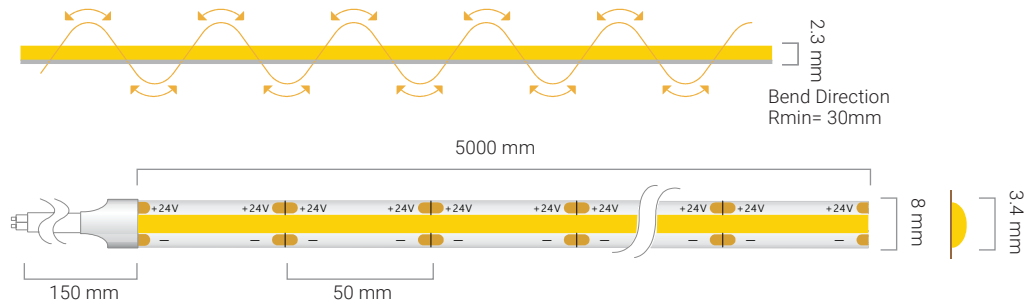

Technical Parameters


Input Current	2A
Regulatory Qualifications	
Class Rating	Class I
Energy Efficiency	A
Certification	CE, RohS
Packaging info	
Carton Size (mm)	62*47.2*28
QTY/CTN	1000m
Net Weight	18,1
Gross Weight	19,5
Accessories	

STRIP LIGHT ACCESSORIES



R004

Wireless dimmer 12V/24V with Remote- 5M. Max 6Amp
L115 x W56 x H34



SR301L 6000K
SR302L 4000K
SR303L 3000K
L Shaped Connector

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za

12/24V STRIP LIGHT FAST CONNECTORS



R134

FAST 2way connector with 10cm cable in between for **8mm** COB/SMD



R135

FAST 2way connector with 10cm cable in between for **10mm** SMD



R136

FAST 2way connector with 10cm cable in between for **10mm** RGB SMD

Works with IP20 14.4W SMD

R124

FAST connector 10cm tails to RGB strip **10mm**



4 PIN
10 MM

R125

FAST connector RGB strip to strip **10mm**



Works with IP20 18W RGBW (4000K) SMD

R126


FAST connector 10cm tails to RGBW strip **10mm**



5 PIN
10 MM

R127

FAST connector RGBW strip to strip **10mm**



R137

FAST L connector RGB strip to strip **10mm** SMD



Works with Matrix Strip

R131


FAST connector 10cm tails to strip **8mm** 3Wire SMD Matrix 3CCT



3 PIN
8 MM

R132

FAST connector strip to strip **8mm** 3Wire SMD Matrix 3CCT



Works with IP20 10W COB, 4.8W and 9.6W SMD

R120

FAST connector 10cm tails to strip **8mm** COB/SMD



2 PIN
8 MM

R121

FAST connector strip to strip **8mm** COB/



R128

FAST L seamless connector strip to strip **8mm** COB/ SMD



R133

FAST T and L seamless connector strip to strip **8mm** COB/SMD



Works with IP20 14.4W SMD

R122

FAST connector 10cm tails to strip **10mm** SMD



2 PIN
10 MM

R123

FAST connector strip to strip **10mm** SMD



R129

FAST L connector strip to strip **10mm** SMD works with IP20 14.4W SMD



ALL
CONNECTORS
FIT IN OUR
ALUMINIUM
PROFILES