

LED Filament Candle

4W

Applications:

Residential and Commercial Applications.

- Full Glass body thermally tested to ensure adequate heat dissipation from the lamp extending the overall lifespan of the LEDs.
- Filament style LED array, providing for a more traditional ambience – ideal for adding character to a room.
- Available in a frosted variant reducing the amount of glare whilst still providing excellent light output.
- Available in all common bases, namely E27,E14 and BC allowing for a quick and easy installation/ retrofit.
- 360° beam angle providing a uniform, even light distribution.
- Available in a dimmable option allowing you to create the perfect atmosphere at any time.
- Highly efficient LED filament with up to 440 effective lumens.
- Serves as a direct replacement to halogen/incandescent lamps containing no mercury, lead or other harmful substances.
- Durable LED Lamp with a built in 1kV surge protector.


Product Performance

Wattage	4W
Colour Temperature & Stock Code	<p>Clear Glass</p> <p>CF001 - 6000K SES CF002 - 3000K SES CF003 - 6000K ES CF004 - 3000K ES CF005 - 6000K BC CF006 - 3000K BC CFD01 - 6000K SES DIM CFD02 - 3000K SES DIM</p> <p>Frosted Glass</p> <p>CFF001 - 6000K SES CFF002 - 3000K SES CFF007 - 4000K SES CFF003 - 6000K ES CFF004 - 3000K ES CFF005 - 6000K BC CFF006 - 3000K BC CFF008 - 4000K ES CFF009 - 4000K BC CFDF01 - 6000K SES DIM CFDF02 - 3000K SES DIM CFDF07 - 4000K SES DIM CFDF03 - 6000K ES DIM CFDF04 - 3000K ES DIM CFDF05 - 6000K BC DIM CFDF06 - 3000K BC DIM CFDF08 - 4000K ES DIM CFDF09 - 4000K BC DIM</p>
Operating Temperature	-20~40°C
Life Span/ LB Rating	L70B50@25 000hrs
IP Rating	IP20
LED Driver	Linear IC
Beam Angle	360°
Impact Protection Grade	-
Input Voltage	220V-240V
CRI	>80
Lumen Output	440lm
Lumen Efficiency (per	110lm/w
LED Chips	LED Filament
LED Chips Qty	4
Dimmable	Dimmable options available
Dimmable Range	0-100
(Dali/Trailing/Leading)	Leading


Packaging



Luminous Intensity Distribution Diagram

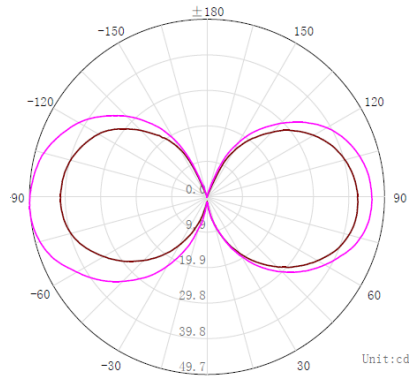

Dimension Drawing

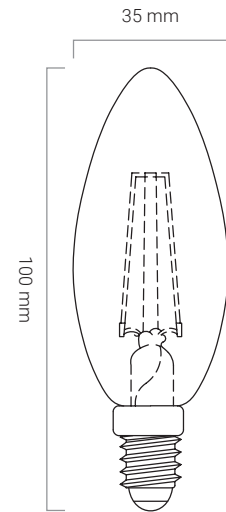

Physical Characteristics

Weight (g)	E14 - 12,3 E27 - 14,3 B22 - 16,5
Housing Material	Glass
Product Dimensions (mm)	35 X 100 h

Technical Parameters

Input Current	35mA
Output Voltage	260-280V
Humidity	80%
Frequency	50-60Hz
In Rush Current	-
Output Current	10-13mA
Flicker Free (Y/N)	Yes
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class II
Energy Efficiency	A
Certification	CE, EMC, RoHS, ISO9001

Accessories

Optional accessories	-
-----------------------------	---

Packaging info

Storage Temp	-20~80°C
Carton Size (mm)	40*21*24
QTY/CTN	100
Net Weight	3,5 kg
Gross Weight	4,3 kg

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za