

# DYCE COB Dotless Strip Light

10W | 24V

## Applications:

Residential and Commercial Applications.

- Highly customizable with cutting points every 50mm.
- Genuine 3M adhesive backing tape for safe and quick installation.
- High CRI>80 ideal for specialized environments which require high colour rendering.
- 180° wide beam angle LED strip.
- Sanan SMD LED Chips with an efficacy of > 100lm/W.
- Increase the LED lifespan whilst reducing lumen decay by adding either our surface, recessed or corner pure aluminium profiles.
- Available in fully encased coated IP65.
- Ideal for commercial/residential applications.

## Product Performance

<b>Wattage</b>	10W
<b>Colour Temperature &amp; Stock Code</b>	<b>50m 6000K-SWR301A   50m 4000K-SWR302A</b> <b>50m 3000K-SWR303A   1m 6000K-SW301</b> <b>1m 4000K-SW302   1m 3000K-SW303</b>
<b>Life Span/ LB Rating</b>	25000hrs
<b>IP Rating</b>	IP65
<b>Beam Angle</b>	180°
<b>Input Voltage</b>	DC24V
<b>Cutting Point</b>	2.5 cm
<b>Power Factor</b>	>0.9
<b>CRI</b>	>80
<b>Lumen Output</b>	>1000lm/M
<b>Lumen Efficiency</b>	>100lm/W
<b>LED Chips</b>	COB
<b>LED Chips Qty</b>	280
<b>Dimmable</b>	Dimmable with PS005D
<b>Note</b>	Max 6 metre run without voltage drop


## Physical Characteristics

<b>Product Dimensions (mm)</b>	10*4.5
<b>Mounting Option</b>	Double sided tape


## Technical Parameters

<b>Input Current</b>	0.583A
<b>Regulatory Qualifications</b>	
<b>Class Rating</b>	Class I
<b>Energy Efficiency</b>	A
<b>Certification</b>	CE, EMC

Packaging

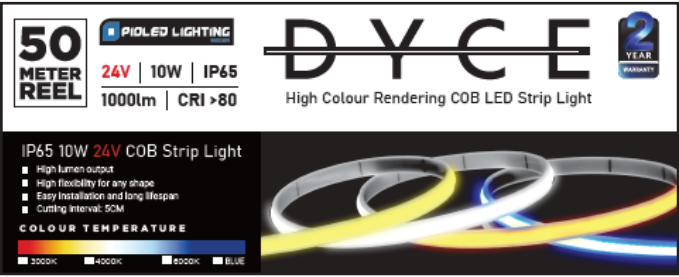

Dimension Drawing

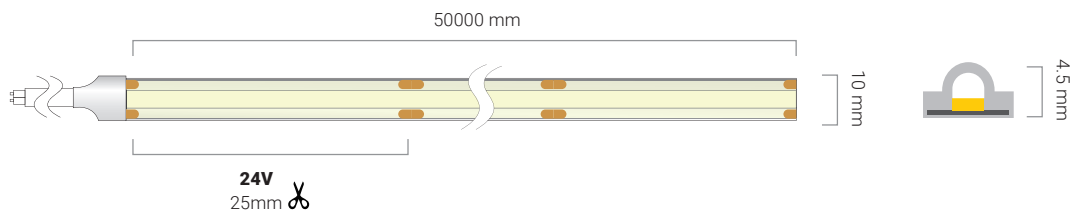

Accessories	
Optional accessories	<b>XA030</b> - DYCE Quick Connector with wire <b>XA031</b> - DYCE Strip to Strip Connector <b>XA032</b> - DYCE L Connector <b>XA033</b> - DYCE End CAP <b>XA034</b> - DYCE Waterproof CAP with Cable
Packaging info	
Carton Size (mm)	255*255*105
QTY/CTN	50
Net Weight	2,6
Gross Weight	2,8

DYCE STRIP LIGHT CONNECTOR **ACCESSORY**



**XA030**  
DYCE Quick Connector  
with wire  
L 216.5 x W 15.3 x H 8.5




**XA031**  
DYCE Strip to Strip  
Connector  
L 35.5 x W 15.3 x H 8.5



**XA032**  
DYCE L Connector  
L 24 x W 24 x H 8.5



**XA033**  
DYCE End CAP  
L 11 x W 12 x H 7

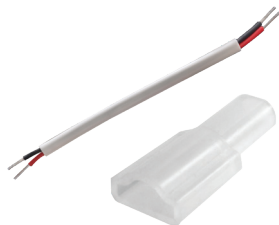

**XA034**  
DYCE Waterproof  
CAP with Cable  
L 120 x W 5.2 x H 3.2  
L 22 x W 12 x H 7

E&OE