

Modular Floodlight

960W

*External 10kV Surge Protectors are included with all our Modular Floodlights from July 2022 onwards.

Applications:

Residential and Commercial Applications.

- Coastal Grade 1100 coastal powder coated aluminium frame with 1060 pure aluminium radiating modules and hollowed out rivets serving as a heat sink.
- 316 3-part stainless steel bracket designed to decrease installation time whilst preventing rust and corrosion.
- High Power Philips 5050 SMD Chips with an efficacy of 160lm/W.
- 20°/90°/140°x100° (asymmetrical beam angle) optics available. (Standard @ 90°).
- 270° rotatable bracket with each module being able to tilt independently reducing light spillage.
- Built in 10kV surge protection allowing for use within the most demanding environments.
- Resistant to UV rays with a wide operating temperature of -40°C to 50°C.


Product Performance

Wattage	960W
Colour Temperature & Stock Code	5700K 90D - F027
Operating Temperature	-20~40°C
Life Span/ LB Rating	L80B20>50000H
IP Rating	IP65
LED Driver Brand	Mean Well or Inventronics
Beam Angle	90°
Impact Protection Grade	IK10
Input Voltage	AC180-277V
Surge Protection	10kV
Power Factor	0.95
CRI	>83
Lumen Output	153 600
Lumen Efficiency	160lm/W
LED Chips	Philips 5050
LED Chips Qty	184 x 2 = 368
Dimmable	Non-Dimmable
Dimmable Range	-
(Dali/Trailing/Leading)	-


Physical Characteristics

Weight (kg)	21.5
Housing Material	Pure Aluminium
Product Dimensions (mm)	H 597 x L 369 x W 132 x 2
Cable Length	0.3
Mounting Option	-
Bracket Material	316 3-part Stainless Steel Bracket
Bolts and Screws	316 Stainless Steel


Luminous Intensity Distribution Diagram

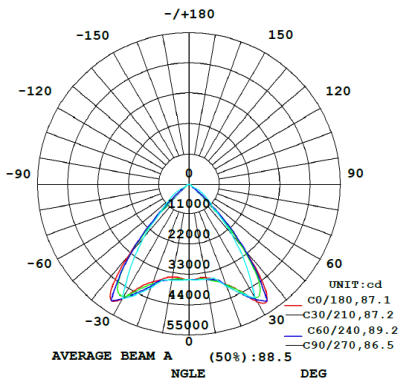

Packaging

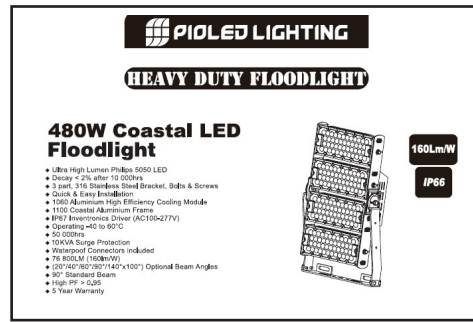

Dimension Drawing

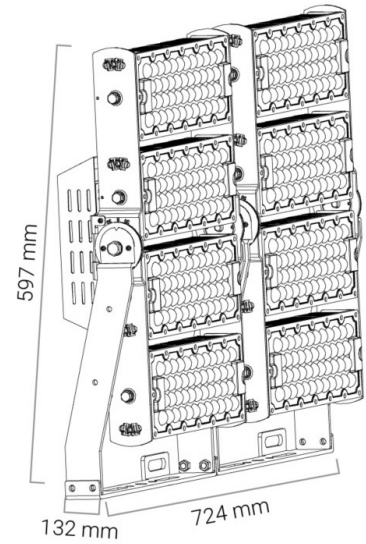

Technical Parameters

Input Current	2400mA x 2 = 4800mA
Output Voltage	48
Flicker Free (Y/N)	Yes
Humidity	40%~80%
Frequency	47-63hz
In Rush Current	120A MeanWell /147A Inventronics x 2
Output Current	9.2A X 2 = 18.4
THD	<20%
TA & TC	TA=-20 ~45 °C/TC=65°C

IES (Yes or No)

Yes

Regulatory Qualifications

Class Rating	Class I
Energy Efficiency	A
Certification	CE, EMC, IEC60958, RoHS, ISO9001






Accessories

Optional accessories

Screws Kit- F027A | 4.5mm 316 Stainless Steel- F027B
140*100° lens- F025B

Packaging info

Storage Temp	-40~+60°C
Carton Size (mm)	647*424*183 X 2
QTY/CTN	1
Net Weight	9.6 X 2 = 19.2
Gross Weight	10.8 X 2 = 21.6

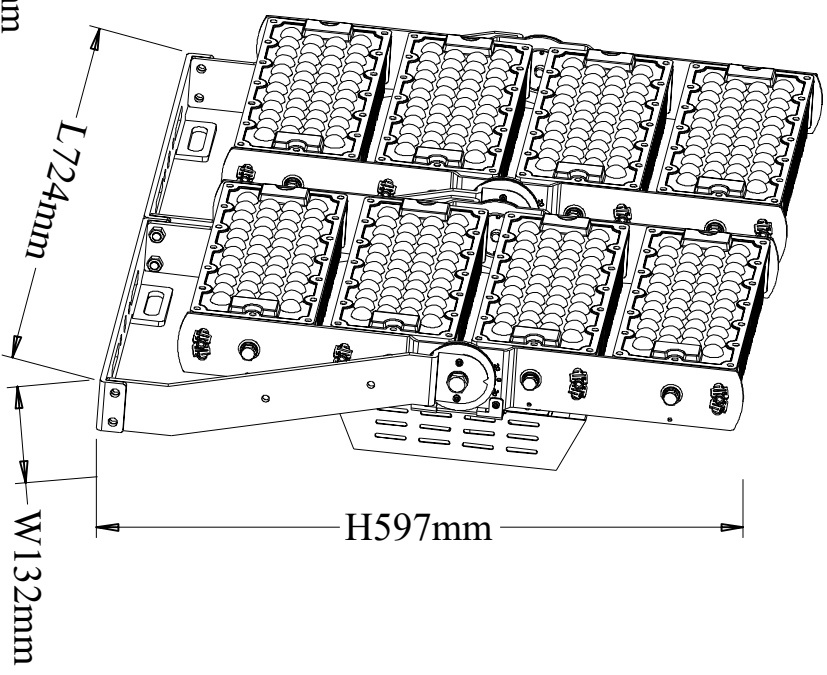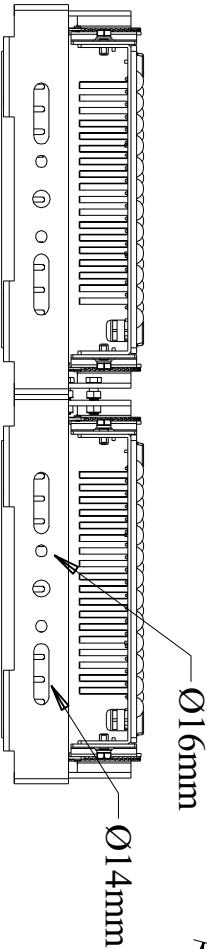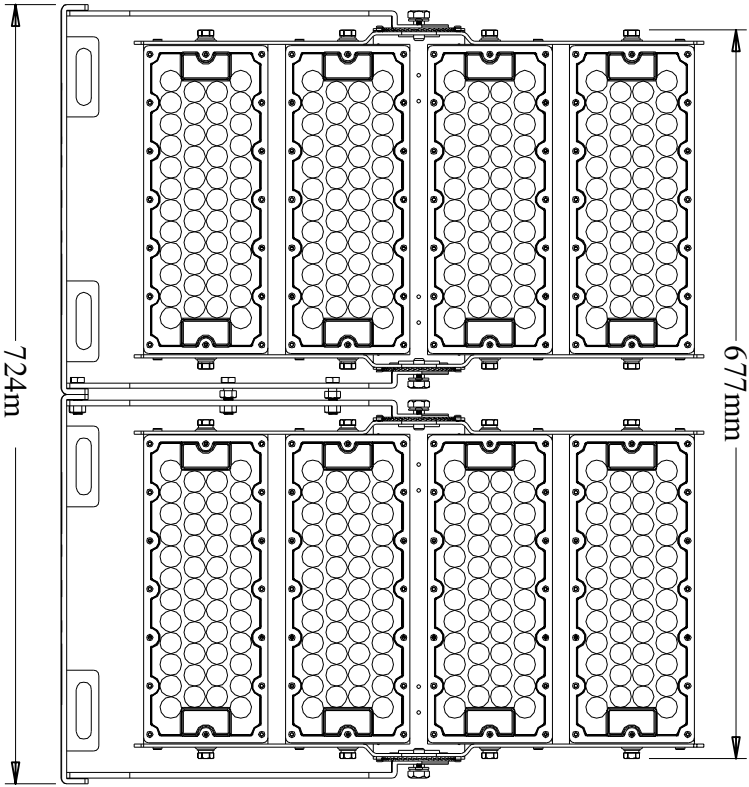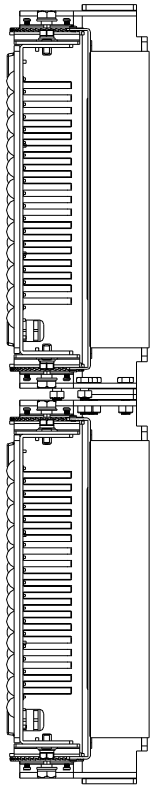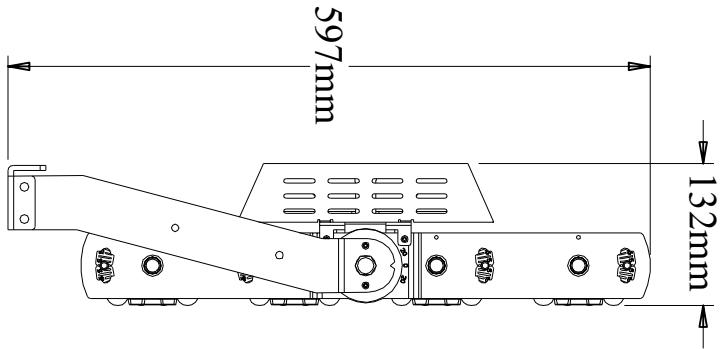

Weight = 21.5kg