

Mamba IP33 Project Linear Light


4ft, 40W

Applications:

Residential and Commercial Applications.

Product Performance	
Wattage	40W
Colour Temperature & Stock	3CCT White - LL016 3CCT Black - LL018
Operating Temperature	-20~45°C
Life Span/ LB Rating	L80B10@25000Hrs
IP Rating	IP33
LED Driver Brand	PioLED High Spec Driver
Beam Angle	120°
Impact Protection Grade	IK06
Input Voltage	185V-277V
Surge Protection	1kV
Power Factor	>0.9
CRI	>80
Lumen Output	4400
Lumen Efficiency	110lm/W
LED Chips	Sanan
LED Chips Qty	312
Dimmable	No
Dimmable Range	-
(Dali/Trailing/Leading)	-
Physical Characteristics	
Weight (g)	575
Housing Material	Pure Aluminium
Product Dimensions (mm)	L1200*W75*H24
Cable Length	80cm
Mounting Option	Mounting Clips
Bracket Material	SS
Bolts and Screws	3pcs each


Luminous Intensity Distribution Diagram



Packaging



Dimension Drawing

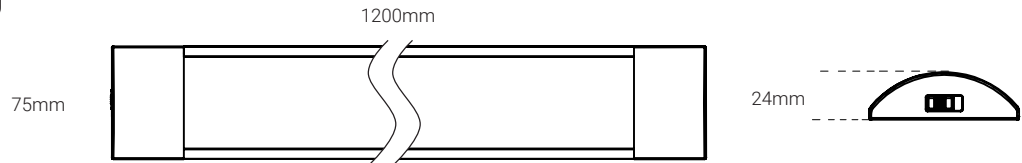

Technical Parameters

Input Current	0.18A
Output Voltage	232.9V
Flicker Free (Y/N)	Yes
Humidity	65,00%
Frequency	50-60hz
In Rush Current	15.6A
Output Current	167.5mA
THD	Pass
TA & TC	TA= -10~40 °C/TC=75°C
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class I
Energy Efficiency	A
Certification	CE, IEC60598, EMC

Accessories

Optional accessories	2M hanging strip for Linear light - LL099
-----------------------------	--

Packaging info

Storage Temp	25°C
Carton Size (mm)	L1265*W325*H180
QTY/CTN	20PCS
Net Weight	11,5
Gross Weight	15,5