
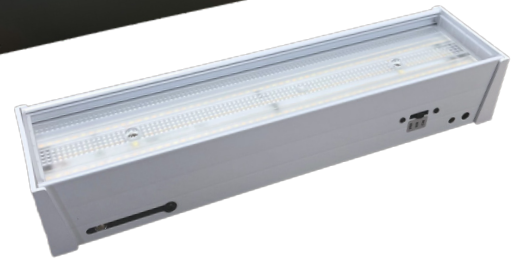


Rotary Union

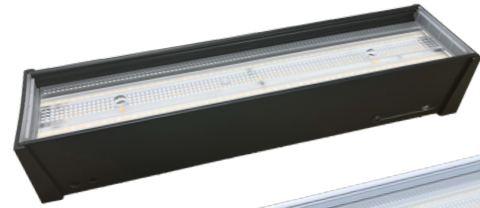

Soniq Linkable Retail Linear

10W

Applications:

Residential and Commercial Applications.

- High Power Factor >0.9 BOKE LED Driver with a 2.5kV Surge Protection offering a robust luminaire with a 5 year warranty.
- Pure Aluminum housing coupled with a PC diffuser, designed to ensure maximum comfort for customers when used in retail applications.
- Linkable up to 60m or 50 x 4ft SoniQ Linears. Ideal for long isles where continuous lighting is a requirement.
- L80B20 @ 50 000hrs ensuring minimal lumen decay throughout the 5 year warranty period.
- Available in either 60°/90°(standard) & 120° beam angles, allowing for an extremely versatile luminaire to suit most applications.
- Available in 3CCT (3000K/4000K/6000K) Controlled via the luminaires dipswitch for a quick and easy CCT transition.
- High CRI>80 making the SoniQ the ideal Retail & Commercial LED Solution.


Product Performance

| | |
|---------------------------------------|---|
| Wattage | 10W |
| Colour Temperature & Stock | 3CCT Black - LL707 3CCT White - LL708 |
| Operating Temperature | -25~45°C |
| Life Span/ LB Rating | L80B20>50000H |
| IP Rating | IP20 |
| LED Driver Brand | PioLED High Spec Driver |
| Beam Angle | 90° |
| Impact Protection Grade | IK08 |
| Input Voltage | AC180-277V |
| Surge Protection | 2.5kV |
| Power Factor | 0.9 |
| CRI | >80 |
| Lumen Output | 1 500 |
| Lumen Efficiency | 150lm/W |
| LED Chips | Epistar 2835 |
| LED Chips Qty | 180 |
| Dimmable | No |
| Dimmable Range | - |
| (Dali/Trailing/Leading) | - |


Physical Characteristics

| | |
|--------------------------------|--------------------|
| Weight (kg) | 0.712 |
| Housing Material | Pure Aluminium |
| Product Dimensions (mm) | 300*74*52 |
| Cable Length | 0.3m |
| Mounting Option | Surface/Suspension |
| Bracket Material | - |

Packaging

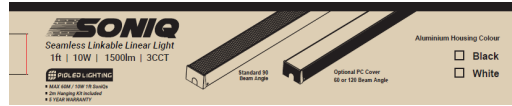

Dimension Drawing

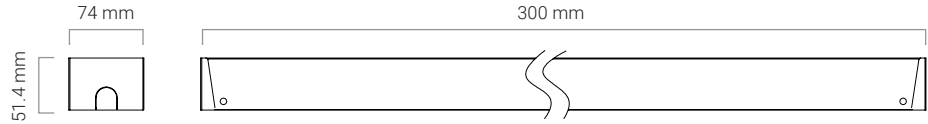

Technical Parameters

| | |
|---------------------------|-----------------------|
| Input Current | 45mA |
| Output Voltage | 45 |
| Flicker Free (Y/N) | Yes |
| Humidity | 40%~80% |
| Frequency | 50-60hz |
| In Rush Current | 10A |
| Output Current | 0.2A |
| THD | <20% |
| TA & TC | TA= -20~45 °C/TC=65°C |
| IES (Yes or No) | Yes |

Regulatory Qualifications

| | |
|--------------------------|-------------------|
| Class Rating | Class I |
| Energy Efficiency | A |
| Certification | CE, EMC, IEC60958 |



Accessories

Optional accessories

SONIQ 60D lens x 1 - **LL705a**
 SONIQ 120D Opal Cover - **LL705b**
 SONIQ Rotary Union - Black - LL705c
 SONIQ Batwing LR40 30°/30° lens x 1 - **LL705d**
 Rotary Union - Black - **LL705c**
 SONIQ 3CCT 4Gr Linkable L Shape Linear Light 90D - **LL710**
 SONIQ 40CM Black bracket with 3M hanging Cable - **LL705f**
 SONIQ 30CM Black Honeycomb Cover - **LL705g**
 SONIQ L Shape Opal Cover - **LL705h**
 Suspended Ceiling Clips White (Pair) - **R114**

Packaging info

| | |
|-------------------------|-------------|
| Storage Temp | -40~+60°C |
| Carton Size (mm) | 790*340*310 |
| QTY/CTN | 40 |
| Net Weight | 28,5 |
| Gross Weight | 34 |

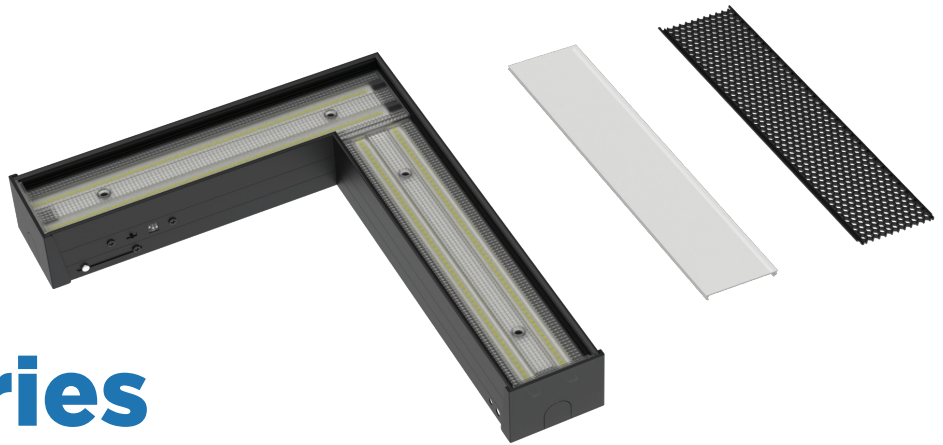

Soniq Accessories

Applications:

Residential and Commercial Applications.

- High Power Factor >0.9 BOKE LED Driver with a 2.5kV Surge Protection offering a robust luminaire with a 5 year warranty.

- Pure Aluminum housing coupled with a PC diffuser, designed to ensure maximum comfort for customers when used in retail applications.



- Linkable up to 60m or 50 x 4ft SoniQ Linears. Ideal for long isles where continuous lighting is a requirement.

- L80B20 @ 50 000hrs ensuring minimal lumen decay throughout the 5 year warranty period.


- Available in either 60°/90°(standard) & 120° beam angles, allowing for an extremely versatile luminaire to suit most applications.

- Available in 3CCT (3000K/4000K/6000K) Controlled via the luminaires dipswitch for a quick and easy CCT transition.

- High CRI>80 making the SoniQ the ideal Retail & Commercial LED Solution.

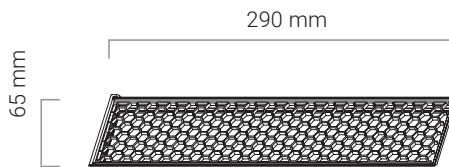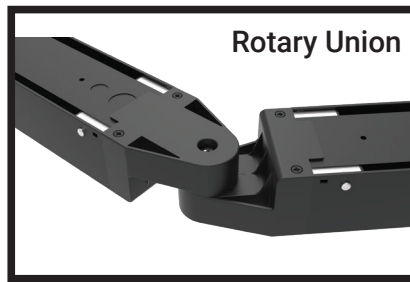

Honeycomb Lens

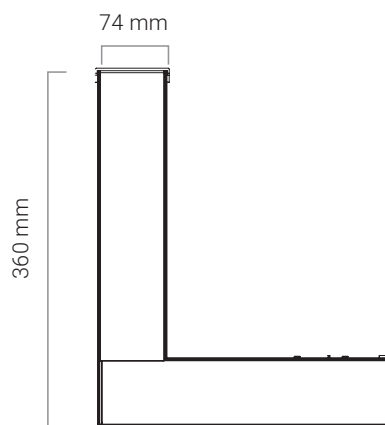

L Shape Linear

40cm Black Bracket with 3M hanging Cable

