



14.4W IP65 Strip Light

24V


Applications:

Residential and Commercial Applications.

- Genuine 3M adhesive backing tape for safe and quick installation.
- High CRI>80 ideal for specialized environments which require high colour rendering.
- 120° wide beam angle LED strip.
- Increase the LED lifespan whilst reducing lumen decay by adding either our surface, recessed or corner pure aluminium profiles.
- Safe to use in open areas as the LED strip provides minimal heat and is only 24V.
- Available in encased coated IP65.
- 2/3oz thick PCB for super fast heat dissipation.
- Ideal for commercial/ residential applications.

Product Performance	
Wattage	14.4W
Colour Temperature & Stock Code	1m RGB - SW207 10m RGB - SWR207 50m Proj RGB - SWR207A
Life Span/ LB Rating	25000hrs
IP Rating	IP65
Beam Angle	120°
Input Voltage	24V DC
Cutting Point	10 cm
CRI	>80
LED Chips	SMD 5050
LED Chips Qty	60/m
Dimmable	Yes
Note	10m run without voltage drop
RUN	
Weight (g)	850 - 10m
Product Dimensions (mm)	5x12x1000mm
Mounting Option	Back Adhesive
Cable Length	20cm
Technical Parameters	
Input Current	6A
Regulatory Qualifications	
Class Rating	Class I
Energy Efficiency	A
Certification	CE, RohS

Dimension Drawing

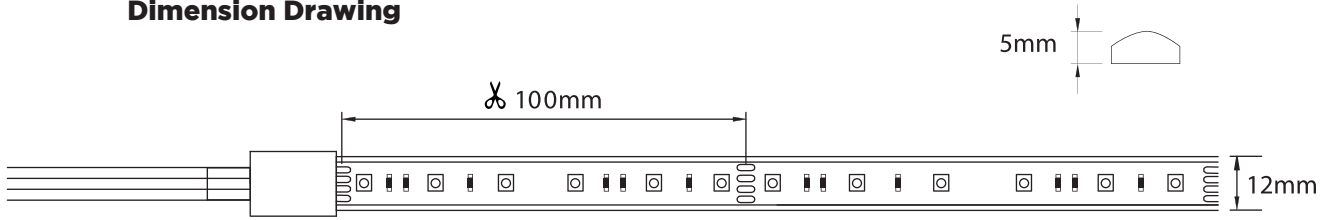

Packaging info	
Carton Size (mm)	62*47.2*28
QTY/CTN	400m
Net Weight	21,5
Gross Weight	23,9
Accessories	

Optional accessories

- R005** - Matrix RGB Controller with Remote Max 100m
- R001** - RGB Amplifier 12V/24V
- R002** - RGB Controller 12V/24V with Remote - 5m
- R003** - RGB Controller 12V/24V - 10M

STRIP LIGHT ACCESSORIES



- R005**
 RGBW WIFI Smart
 Battery: 2032
 Controller 12V/24V with
 Remote
 Max wattage: 12V: 230
 24V: 460W



- R001**
 RGB Amplifier 12V/24V
 L105 x W65 x H23
 Max wattage: 12V:144W
 24V:288W



- R002**
 RGB Controller 12V/24V
 with Remote - 5m
 L61 x W35 x H22
 Max wattage: 12V:72W
 24V:144W



- R003**
 RGB Controller
 12V/24V - 10M
 L130 x W64 x H24
 Max wattage:
 12V:144W
 24V:288W