


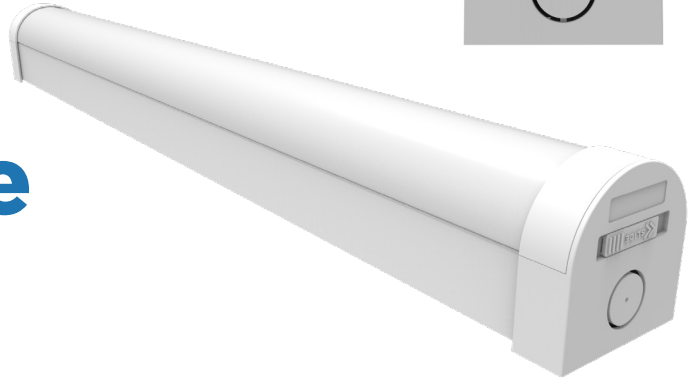

Oarca Linkable Batten Light

4ft | 40W

Applications:

Residential and
Commercial Applications.


Product Performance

Wattage	40W
Colour Temperature & Stock Code	3CCT White - LL803 3CCT Black - LL804 3CCT White Motion Sensor - LL803SD
Operating Temperature	-20~40°C
Life Span/ LB Rating	L80B20>50000H
IP Rating	IP33
LED Driver Brand	PioLED High Spec Driver
Beam Angle	120°
Impact Protection Grade	-
Input Voltage	190-277V
Surge Protection	1.5kV
Power Factor	0.9
CRI	>80
Lumen Output	6 000
Lumen Efficiency	150lm/W
LED Chips	Epistar 2835
LED Chips Qty	208
Dimmable	No
Dimmable Range	-
(Dali/Trailing/Leading)	-

Physical Characteristics

Weight (kg)	1.2
Housing Material	PC + Iron
Product Dimensions (mm)	1200*63.5*65
Cable Length	-
Mounting Option	Surface
Bracket Material	-
Bolts and Screws	Galvanized Iron


Luminous Intensity Distribution Diagram

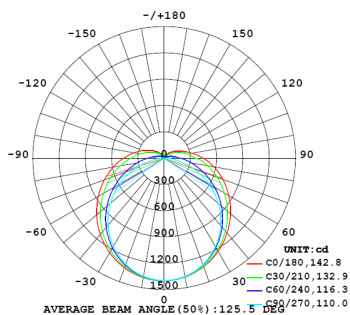

Packaging



Dimension Drawing

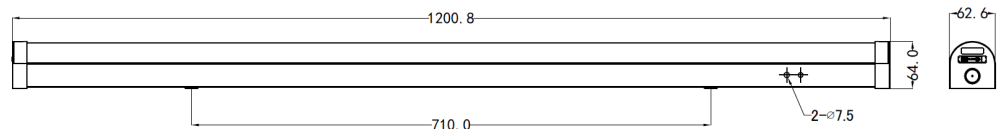

Technical Parameters

Input Current	195mA
Output Voltage	112-160V DC
Flicker Free (Y/N)	Yes
Humidity	0%~90%
Frequency	<5%
In Rush Current	24.6A
Output Current	250mA
THD	<20%
TA & TC	TA= -25°C/TC=85°C
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class I
Energy Efficiency	A
Certification	SANS IEC60598-2-1, SANS IEC61347-2-13, CE, TUV, GS, ERP

Accessories

Optional accessories	12V Adjustable Microwave Sensor - LL809
----------------------	---

Packaging info

Storage Temp	-20°C~75°C
Carton Size (mm)	122*14.8*22.2
QTY/CTN	6
Net Weight	7,2
Gross Weight	8,2

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za