
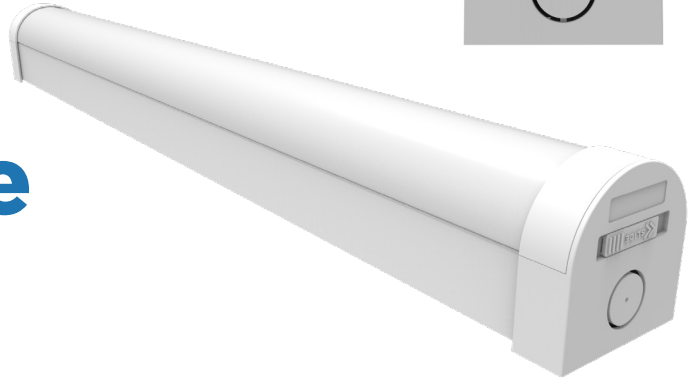




Oarca Linkable Batten Light

5ft | 60W

Applications:

Residential and
Commercial Applications.


Product Performance

Wattage	60W
Colour Temperature & Stock Code	3CCT White - LL805 3CCT Black - LL806 3CCT White Motion Sensor - LL805SD
Operating Temperature	-20~40°C
Life Span/ LB Rating	L80B20>50000H
IP Rating	IP33
LED Driver Brand	PioLED High Spec Driver
Beam Angle	120°
Impact Protection Grade	-
Input Voltage	190-277V
Surge Protection	1.5kV
Power Factor	0.9
CRI	>80
Lumen Output	9 000
Lumen Efficiency	150lm/W
LED Chips	Epistar 2835
LED Chips Qty	236
Dimmable	No
Dimmable Range	-
(Dali/Trailing/Leading)	-

Physical Characteristics

Weight (kg)	1.3
Housing Material	PC + Iron
Product Dimensions (mm)	1500*63.5*65
Cable Length	-
Mounting Option	Surface
Bracket Material	-
Bolts and Screws	Galvanized Iron


Luminous Intensity Distribution Diagram

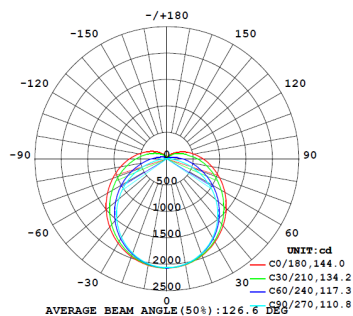


Packaging



oarca 3CCT 5ft 60W Linkable Batten IP33 150lm/W
(3000K/4000K/6000K 3 in 1)



Dimension Drawing



Technical Parameters

Input Current	290mA
Output Voltage	120-171V DC
Flicker Free (Y/N)	Yes
Humidity	0%~90%
Frequency	<5%
In Rush Current	30A
Output Current	350mA
THD	<20%
TA & TC	TA= -25°C/TC=85°C
IES (Yes or No)	Yes

Regulatory Qualifications

Class Rating	Class I
Energy Efficiency	A
Certification	SANS IEC60598-2-1, SANS IEC61347-2-13, CE, TUV, GS, ERP

Accessories

Optional accessories	12V Adjustable Microwave Sensor - LL809
----------------------	---

Packaging info

Storage Temp	-20°C~75°C
Carton Size (mm)	152*14.8*22.2
QTY/CTN	6
Net Weight	7,8
Gross Weight	8,9

E&OE

PioLED Lighting (Pty) Ltd | 031 701 5746 | info@pioledlighting.africa

www.pioledlighting.co.za