

KUDA MAX Linkable Linear Batten


55/45/36/28W | 5ft

Applications:


Residential and
Commercial Applications.

Product Performance	
Wattage	55/45/36/28W
Colour Temperature & Stock Code	3CCT(3000K/4000K/6000K) White - LL913
Operating Temperature	-20~40°C
Life Span/ LB Rating	50000hrs
IP Rating	IP65
LED Driver Brand	High Spec PioLED Driver
Beam Angle	120°
Input Voltage	190-277V
Surge Protection	1.5kV
Power Factor	>0.9
CRI	>80
Lumen Output	55W = 7700lm 45W = 6300lm 36W = 5040lm 28W = 3920lm
Lumen Efficiency	140lm/W
LED Chips	2835 SMD
LED Chips Qty	312
Dimmable	Non-Dimmable
Note	Suitable for Emergency Battery Backup Kit
Physical Characteristics	
Weight (kg)	1.72
Housing Material	PC
Product Dimensions (mm)	1540*70*73
Cable Length	-
Mounting Option	Surface Mount
Bracket Material	-
Bolts and Screws	Galvanized iron

Packaging



Dimension Drawing

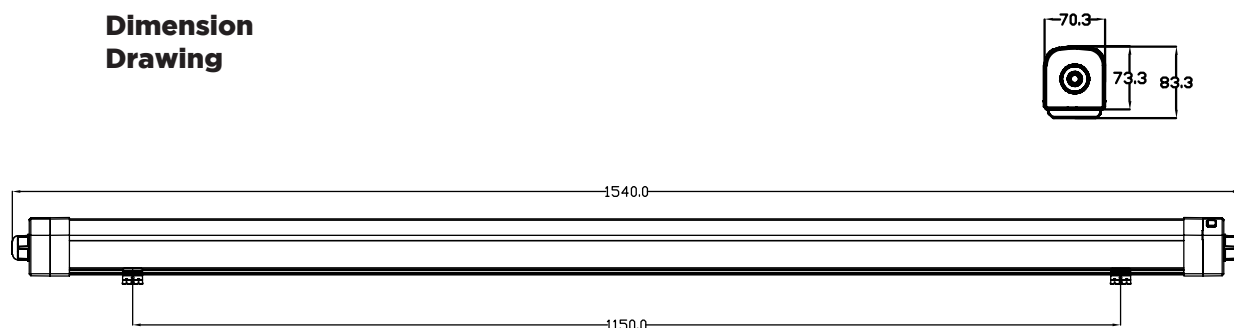

Technical Parameters

Input Current	270A
Output Voltage	120-171V DC
Flicker Free (Y/N)	Yes
Humidity	0-93%
Frequency	<5%
In Rush Current	24.4A
Output Current	350mA
THD	<20%
TA & TC	TA=25°C/TC=85°C
IES (Yes or No)	Yes
Regulatory Qualifications	
Class Rating	Class I
Energy Efficiency	A
Certification	CE, EMC, IEC60598, ErP
Accessories	
Optional accessories	-
Packaging info	
Storage Temp	-40~+80°C
Carton Size (mm)	160.5*17.5*32.4
QTY/CTN	8
Net Weight	14kg
Gross Weight	15kg