



Delta Linear Highbay

240/200/150W

Applications: Industrial and Commercial Applications.


Product Performance

Wattage	240/200/150W
Colour Temperature & Stock Code	3CCT (4000/5000/5700K) HBL041
Operating Temperature	-30~45°C
Life Span/ LB Rating	L80B10@50000hr
IP Rating	IP65
LED Driver Brand	High Spec Flicker Free LiFud LED Driver
Beam Angle	90°
Impact Protection Grade	IK09
Input Voltage	AC100-277V
Surge Protection	6kV
Power Factor	0.9
CRI	>80
Lumen Output	150W - 25 500lm 200W - 34 000lm 240W - 40 800lm
Lumen Efficiency	170lm/W
LED Chips	Philips 3030
LED Chips Qty	468
Dimmable	No
UGR	-


Physical Characteristics

Weight (g)	3200
Housing Material	Pure Aluminium Housing
Product Dimensions (mm)	792.4*129.1mm
Cable Length	0.3 meter
Mounting Option	Bracket and Steel Rope
Bracket Material	Iron
Bolts and Screws	Stainless Steel


Luminous Intensity Distribution Diagram

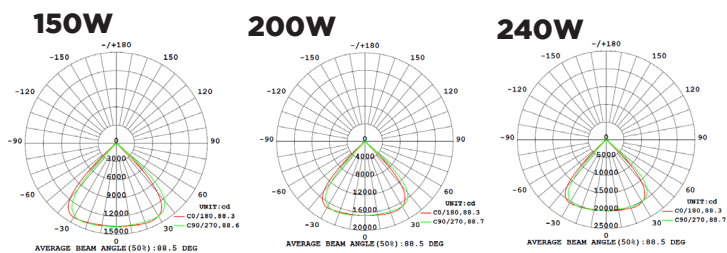

Packaging

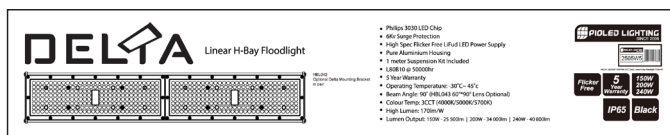

Dimension Drawing

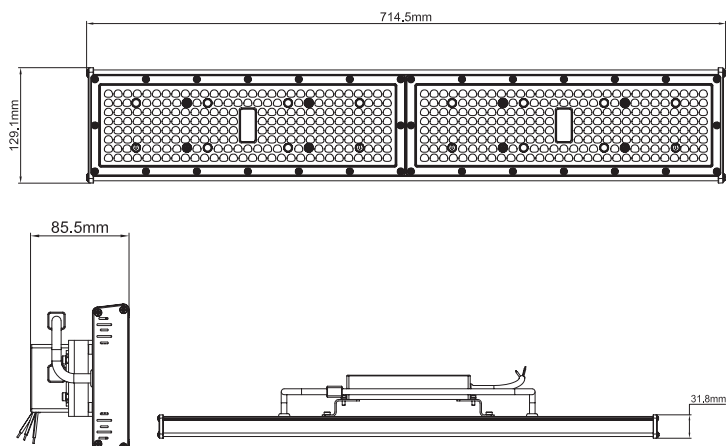

Technical Parameters

Input Current 1.07A@230V AC

Output Voltage 180-260V

Flicker Free (Y/N) Yes

Humidity 10-90%

Frequency 50-60hz

In Rush Current 100A

Output Current 0.75-1.1A

THD <15%

TA & TC 75

IES (Yes or No) Yes

Regulatory Qualifications

Class Rating Class I

Energy Efficiency A

Certification E, EMC, IEC60598

Accessories

Optional accessories HBL042 - Optional Delta Mounting Bracket in pair
HBL043 - 60°*90° Optional Lens X 1 (240W needs 2)

Packaging info

Storage Temp -20~+90°C

Carton Size (mm) 765*180*130

QTY/CTN 1

Net Weight 3,2

Gross Weight 4

**Dimension Drawing with
Mounting Bracket**

